

TITAN 900

(for domestic and commercial waste, waste wood, green waste, tyres, c&d waste etc.)



DIMENSIONS

Version	Track system
Length (mm)	11.000 / 11.000 (Transport)
Width (mm)	3.000 / 3.000 (Transport)
Height (mm)	4.200 / 3.600 (Transport)
Total weight (kg)	35.000

DRIVE	EU	US	ROW*
Engine (Volvo Penta)	TAD 1385 VE	TAD 1672 VE	TAD 1650VE-B
Emission standard	EU Stage V	EPA Tier 4f	Stage IIIA
Power (kW / HP)	405 / 550	515 / 700	405 / 550
Fuel capacity (l)	800		
Gearbox	Bonfiglioli		

DISCHARGE BELT

Discharge height (mm)	max. 4.000
Width (mm)	1.200
Included	Height adjustable over-belt magnet

SHREDDING UNIT


Hopper volume (m³)	5
Shaft length (mm)	2.500
Shaft diameter (mm)	860
Weight (kg / cassette)	7.000
Rotation speed (rpm)	15 – 45

*Rest of the world (country-specific requirements);
We reserve the right to make technical changes, misprints and errors. Status: July 2021



Easy maneuvering and transportability

The standardised track system provides optimal mobility at the operational site and makes transportation on a low-bed truck even more affordable and efficient.

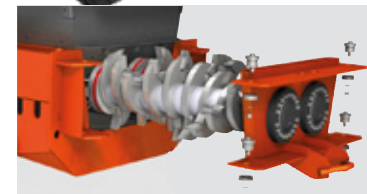

Quick change system for tool shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases productivity.



Hydraulic adjustable side combs

The side combs can be opened or closed to regulate the final grain size. This allows the throughput to be defined depending on the material and the customer's requirements.