

# TITAN 900 e-pu

(for domestic and commercial waste, AG- and EM-tyres, mattresses, waste wood etc.)



## DIMENSIONS

Version	Stationary
Shredding Unit	
Length (mm)	5.000
Width (mm)	3.000
Height (mm)	3.100
Control Unit	
Length (mm)	3.500
Width (mm)	2.300
Height (mm)	2.300
Total weight (kg)	approx. 22.000


## DRIVE

Engine	Electric
Power (kW)	2 x 160
Gearbox	Bonfiglioli

## SHREDDING UNIT


Hopper volume (m <sup>3</sup> )	5
Shaft length (mm)	2.500
Shaft diameter (mm)	860
Weight (kg / cassette)	7.000
Rotation speed (rpm)	15 – 45

\*Rest of the world (country-specific requirements);  
We reserve the right to make technical changes, misprints and errors. Status: March 2021

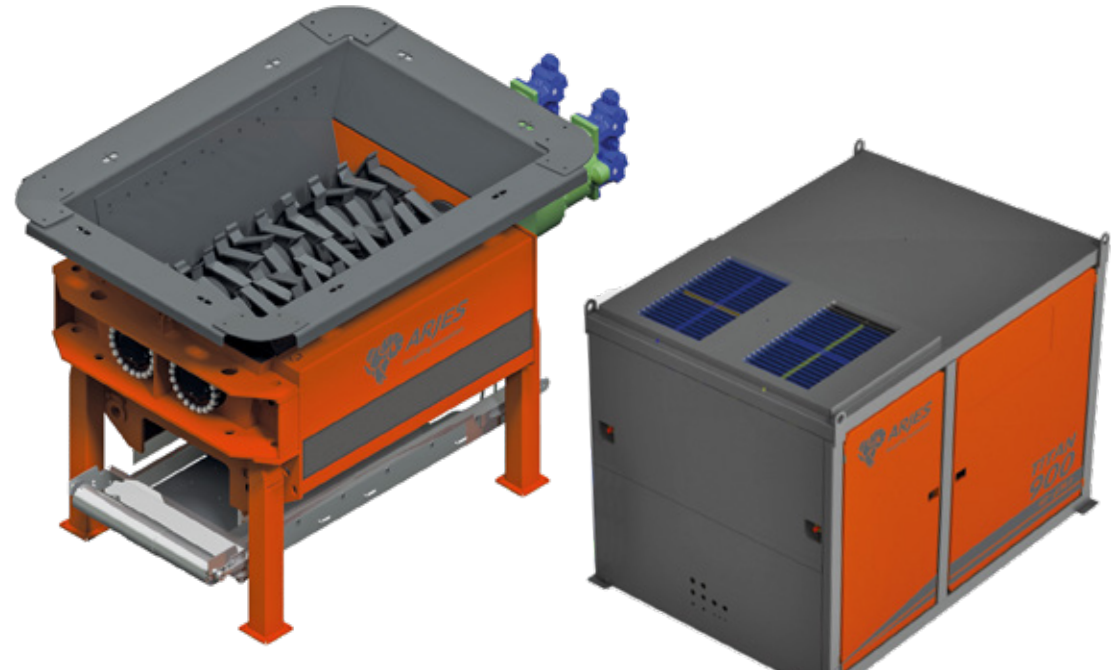

### Separate drive and control unit

Due to distance placement of the shredding and control unit (max 8 meters in between) there is significant less vibration to the control system. Additionally, dust and dirt are reduced.

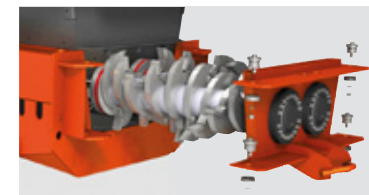

### Quick change system for tool shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases more productivity.



### Hydraulic adjustable side combs

The side combs can be opened or closed to regulate the final grain size. This allows the throughput to be defined depending on the material and the customer's requirements.